

SAGOLA 



**HARDWARE  
DECORATION  
PAINTING EQUIPMENT**

# SAGOLA®



SAGOLA can trace its origins to the year 1955 and is fruit of the pioneering spirit of its founder, Alejandro Sánchez Larrauri. It began as a small subcontracting workshop for industry. After some years in the subcontracting sector, Larrauri felt the need to manufacture his own product and progressively withdraw from subcontracted activity.

The chosen product was the spray gun. This new era for SAGOLA was crowned by the manufacture and sale of the mythical ALM 401 spray gun. From that very moment SAGOLA began to make and distribute a large number of spray gun models and other complements used in the coatings sector such as air filters, pressure pots, and an endless list of equipment for the most varied applications.

Due once again to the entrepreneurial spirit of the SAGOLA team, the need was felt to open the company to the international market. For that reason the Company began operating in related markets such as Latin America, where it soon became the indisputable leader, later expanding to Arab countries, Asia and finally Europe. Today, SAGOLA is present in more than 80 countries worldwide.

SAGOLA has maintained the highest quality standards in the manufacture of its products from its very beginnings, which has contributed to become a very important competitor in sectors such as bodyshop and industry. Products range from a simple spray gun to complex CNC coating machines.

Today, after 60 years, SAGOLA is still a 100% family company, a vital reason why it is a dynamic company able to adapt rapidly to changing market situations.

Nowadays SAGOLA is much more than a manufacturer of spray guns and has become a group of companies also engaged in the manufacture of aeronautic components, components for the biomedicine sector, passenger transport services and other service businesses.

**60**  
anniversary  
1955-2015

# Main Index

Catalogue 2019

## AEROGRAPHIC SPRAY GUNS

Pages 5/7

3300 GTO Gravity | 3300 GTO Suction |  
Classic Pro XD Gravity | Classic Lux Gravity | Classic Pro Suction |  
Classic Lux Suction | Junior G | 472 Pro + 777 compressor |

## PAINTING KITS

Page 8

Junior Kit | Super Kit |

## RETOUCHE AND AIRBRUSHING

Page 9

Junior 140 | Junior Star | 474 | Accessories |

## DECORATION SPRAY GUNS

Pages 10/11

Premium 429 N | Classic Gotele Gravity | Classic XD Smooth |  
4001 Gotele Pressure | 4022 | Premium 419 |

## PRESSURE POTS

Page 12

610 | Full equipment 610 + Classic Lux Pressure | Classic 30 Inox |

## TURBINES

Page 13

Turbo 2200 Pro | 455 Spray gun | Turbo 1000 |

## GENERAL APPLICATIONS

Pages 14/16

Classic S1 blowers | Classic Venturi blower | Classic P1 |  
Classic I Plus inflating gun | Classic I 2 inflating gun | Pneumatic undercoating gun 416 |  
3900 Plus sealers |

## SPECIAL APPLICATIONS

Page 17

Classic 414 | Classic 418 | Pressure Adhesives |

## AIR FILTRATION SYSTEMS

Pages 18/19

Plus series filters | FR | FRL | RA |

## COMPRESSED AIR ACCESSORIES

Pages 20/22

Quick couplings, Threaded couplings |

## COMPRESSED AIR HOSES

Page 23

Compressed air hoses | Product hoses |

## PERSONAL PROTECTION

Page 24

Classic MP2 | FFP2 Masks | MP300 |

## INDUSTRIAL ACCESSORIES

Page 25

1200 X Polisher | L series sanders | Scissor rack |

## SPRAY GUN ACCESSORIES

Pages 26/27

Air flow regulators | Accessories for cleaning and maintenance |  
Gravity and suction deposits and accessories | High transfer aircaps |  
Conventional Spray Aircaps | Nozzle + Needle Kits |



**3300 GTO gravity**  
**3300 Pro suction**

# 3300 GTO

## 3300 GTO Gravity

- Light weight
- New body,  
maximum ergonomics
- Time saving
- Top quality  
aluminium aircaps
- There are no O-rings



*The gravity version has the option to be served in case*

New 3300 GTO spray gun. SAGOLA renews and improves the mid-high range of spray guns. Forged and anodized aluminum body. This is a top level product with a magnificent price-quality ratio.  
**EPA aircap:** minimum air consumption with high quality application (>2HP).  
**HVLP aircap:** maximum paint savings and minimum mist.

### TECHNICAL DETAILS

- > Weight without cup: 423 g
- > Dimensions including cup: 34.5 x 10 x 18 cm
- > Air inlet coupling: BSP 1/4" M
- > Cup capacity: 650 ml
- > Cup with removable anti-drip system
- > Design pressure: 8 bar
- > Maximum recommended inlet pressure: 2 bar
- > Recommended application distance:  
GTO HVLP: 12 - 15 cm    GTO EPA: máx. 18 cm
- > Fan size:  
GTO HVLP: 290 - 300 mm    GTO EPA: 250 mm
- > Air consumption per aircap (2 bar inlet):  
GTO HVLP: 360 L/min    GTO EPA: 240 L/min
- > Average sound pressure level: 80 dB
- > Materials in contact with product:  
anodized aluminium, chromed aluminium, POM, INOX, Teflon.



Case code	Box code	Version	Application
10141575	10141555	1.40 [HVLP]	Finishes. Dyes
10141576	10141556	1.60 [HVLP]	General finishes
10141577	10141557	1.80 [HVLP]	Primers and basecoats
10141578	10141562	1.40 [EPA]	Finishes. Dyes
10141579	10141563	1.60 [EPA]	General finishes
10141580	10141564	1.80 [EPA]	Primers
10141585	10141572	2.20 [64S]	Primers. Waterborne clearcoats
10141586	10141574	2.80 [62S]	Gun-applied mastics, polyester. Cast iron effect

## 3300 GTO Suction

- Light and robust
- Maximum ergonomics
- Time saving
- Top quality  
aluminium aircaps

Light, injected aluminium body. This is a top level product with a magnificent price-quality ratio. Versatile. High performance. High speed of application. Large fan size.

### TECHNICAL DETAILS

- > Weight with deposit: 928 g
- > Dimensions including deposit: 28.5x11x18.5 cm
- > Deposit capacity: 1 L
- > Air inlet coupling: 1/4"
- > Design pressure: 8 bar
- > Maximum recommended inlet pressure: 2 bar
- > Recommended application distance: 15-18 cm
- > Air consumption (2 bar inlet): 235 L/min
- > Average sound pressure level: 80 dB
- > Materials in contact with product: anodized aluminium, chromed aluminium, POM, INOX, Teflon.



Code	3300 Pro Suction
10120910	1.40 [EPA] Finishes, dyes
10120911	1.60 [EPA] General finishes
10120912	1.80 [EPA] Primers



Catalogue 2019

**HARDWARE & DECORATION**

**Aerographic spray guns**

# Classic Pro XD

**Classic Pro XD gravity**  
**Classic Lux gravity**



## Classic Pro XD Gravity

Maximum ergonomics and comfort

New body design

No joints between air and paint

Internal air distributor

Nozzles & needles in Stainless steel

Chromed Mate

The best price/quality ratio in conventional primer spray guns.

A new body with improved ergonomics, the widest range of responses and application solutions and complies with the strictest safety standards and with the strictest standards on solvent emissions, distinguish the new model Classic Pro XD.

Single axis system, minimum parts.  
One single piece automatic paint packing gland.  
No gaskets.

Code	Version	Application
10141620	1.40 [EPA]	Finishes
10141623	1.60[EPA]	Finishes and primers
10141625	1.80 [EPA]	Primers and basecoats
10141627	2.20 [25]	Thick primers
10141629	2.50 [36]	High Viscous
10141630	2.80 [28]	Gun applied mastics
10141621	1.40 [HVLV]	Finishes
10141624	1.60 [HVLV]	Finishes and primers
10141626	1.80 [HVLV]	Thick primers
10141631	2.50 [HVLV]	High Viscous

### TECHNICAL DETAILS

- > Weight without deposit: 434 g
- > Dimensions: 34.5 x 10 x 18 cm
- > Air inlet coupling 1/4" male
- > Design pressure: 8 bar
- > Recommended maximum working pressure: 2 bar
- > Recommended distance of application:  
**HVLV:** max. 15 cm.  
**21 EPA & 25/36/28:** max. 18 cm.
- > Maximum paint flow output (1.4 mm. 20" nozzle):  
**21 EPA** Aircap: 192 g/min  
**HVLV** Aircap: 189 g/min
- > Air consumption:  
**HVLV** Aircap: 280 L/min  
**21 EPA** Aircap: 240 L/min  
**25/36/28** Aircap: 320 L/min



# Classic Lux

## Classic Lux Gravity

Robust and economical

Light and versatile



Economical gravity spray gun.  
Conventional painting system with very low air consumption.

New body. Maximum ergonomics.

Light and versatile. High reliability.

Air, paint and air flow regulators.

Gravity deposit with anti-drip system.

### TECHNICAL DETAILS

- > Weight with deposit: 720 g
- > 0.65 L. deposit with anti-drip system
- > Air consumption: 240 L/min at 3.5 bar
- > Incorporates paint filter
- > Stainless steel nozzle and needle

Code	Version	Application
20141401	1.60 [40]	Finishes
20141402	1.80 [40]	Primers and basecoats
20141404	2.00 [41]	Thick fillers. Primer
20141403	2.50 [42]	Highly viscous fillers, gun-applied mastics



**Classic Pro suction**  
**Classic Lux suction**

# Classic Pro

## Classic Pro Suction

Maximum ergonomics

Trigger Smoothness

Minimum mist

High speed of application

Low air consumption

Maximum robustness  
 and reliability

High spraying quality

Code	Version
10120701	1.60 [21] General finishes
10120702	1.80 [21] Primers and basecoats

The best price-quality ratio in conventional spray guns.

Light injected aluminium body. Single spindle design means fewer parts. Regulators in aluminum.

Stainless steel nozzle and needle.  
 One-piece packing nut.

There are no O-rings.

### TECHNICAL DETAILS

- > Weight with deposit: 928 g
- > Dimensions: 29 x 17.5 x 11 cm
- > Air consumption: 21 Aircap: 210 L/min
- > Deposit capacity: 1 L
- > Air inlet coupling thread 1/4" male
- > Maximum air pressure: 8 bar
- > Maximum recommended inlet pressure: 2.5 - 3.0 bar (conventional)
- > Maximum recommended application distance: 20 - 25 cm



# Classic Lux

## Classic Lux Suction

Robust and economical

Light and versatile

Economical gravity spray gun.  
 Conventional painting system with very low air consumption.

New body. Maximum ergonomics.

Light and versatile. High reliability.

Air, paint and air flow regulators.

High capacity suction deposit, 1 liter.

Fastening with flange, anti-drip lid and closure gasket.

### TECHNICAL DETAILS

- > Empty weight: 870 g
- > 1 L. deposit with paint filter
- > Air consumption: 240 L/min at 3.5 bar
- > Incorporates paint filter
- > Stainless steel nozzle and needle



Code	Version
20121101	1.60 [38] Industrial finishes, Primers
20121102	1.80 [39] Primers



## Junior G gravity 472 Pro suction

Catalogue 2019

**HARDWARE &  
DECORATION**

**Aerographic  
spray guns**

# Junior G

## Junior G gravity

New matt chrome body

SAGOLA exclusive design

New aircaps

High transfer



Blister para pistola Junior G



Light and economical gravity spray gun with air valve, high transfer and very low air consumption.

Robust, light and with new ergonomic design proper to work with 1.5 HP compressors.

Product and fan regulators.

Blister or box presentation.



### TECHNICAL DETAILS

- > Dimensions: 32.5x17x10 cm
- > Air consumption: 150 L/min
- > Recommended maximum pressure: 2 bar
- > Weight: 480 g
- > Capacity of deposit: 0.6 L



# 472 Pro

Maximum ergonomics

Low air consumption

Minimum mist

Code	Version
10130102	472 Pro

Code	472 Pro + 777 compressor
10610102	472 Pro + 777 compressor 240V - 50Hz
10610106	472 Pro + 777 compressor 110V - 60Hz



Pressurised spray gun with internal mix aircap permitting operation at extremely low air consumption -only 65 L/min- and very low pressure -1-2 bar-.

It is designed for multi-use, always achieving top quality finishes even with medium viscosity products.

Spray production system with internal mix through two aircaps. New aircaps giving perfectly uniform, top-quality fan: adjustable from circular to perfectly flat. Ideal for single component products. Easy to handle. Totally portable. Internal atomisation track. Continuous air flow. Low level of mist and noise. Clean air - no oil. Application of varnishes and primers.

### TECHNICAL DETAILS

#### 472 Pro

- > Maximum pressure: 3.5 bar.
- > Recommended working pressure 1 - 2 bar.
- > 600 c.c. deposit

#### Premium 777

- > Displaced air: 65 L/min
- > Electric voltage: 240 V/50 Hz single-phase or 110 V/60 Hz
- > Power: 180 w
- > Maximum pressure: 3.5 bar
- > Weight: 3.7 kg

## Super Kit and Junior Kit

# Super Kit



Includes quick connector



### Super Kit

Full professional kit



HARDWARE METAL DECORATION

Professional paint spray gun with stainless steel nozzle.  
 Petroleum spray cleaner with 1L deposit.  
 Highly accurate and durable inflator.  
 Metallic aircaps in P1 and S1.

Code

20160103

### TECHNICAL DETAILS

- > Gravity spray gun: CLASSIC LUX  
 Ø Nozzle: 1.80 - Aircap [40]
- > Inflator - pressure checker: CLASSIC 1
- > Liquids Atomiser: CLASSIC P1
- > Blower: CLASSIC S1
- > Accessory tool

# Junior Kit



Includes quick connector



### Junior Kit

Full DIY kit



DECORATION D.I.Y.

D.I.Y. Kit. Painting, atomisation of liquids, inflation and pressure checking; hose with quick connectors.

Code

20160105

### TECHNICAL DETAILS

- > JUNIOR G Gravity spray gun
- > Blower
- > Air hose
- > Petroleum spray cleaner
- > Inflator





Catalogue 2019

**HARDWARE & DECORATION**

Retouch and Airbrush

**Junior 140, Junior Start and 474  
Accessories for airbrushes**

**Junior 140**

Medium-size nozzle: 0,8 mm

Code

25410104



Double effect airbrush for taking your first steps in the world of feathering and bodyshop design. Comes with a full accessories kit. Air hose and compressor adaptor included.



**Junior start**

Code

40000240



Basic starter airbrush, single effect, external mixing. Air hose and compressor adaptor included.

**474**

Built-in air-flow regulator

The 474 is an economical spray gun for retouching, small zone painting and parts marking.

Code Version

10151701 0.8

10151702 1.0

**TECHNICAL DETAILS**

- > Weight with deposit: 325 g
- > Air inlet coupling thread 1/4" male
- > Maximum air pressure: 7 bar
- > 120 cc. deposit



**ACCESSORIES Airbrushes**

**Air hose**

Textile - 3 m. record 1/8" F - 1/8" M

Code

56414203

Textile - 3 m. record 1/4" F - 1/8" M

Code

56414209



**Airbrush Clean 3NI**

Airbrush cleaning recipient.

Code

40000241



**Multi-airbrush rack**

Bench-top airbrush rack.

Code

40000242





## Premium 429 N, Classic Gotele Gravedad y Classic XD Lisos

### Premium 429N

With air inlet shut-off valve

Product anti-pack system

Stone paints, gotele and viscous products

Code

10140201

Special Nozzle + Needle KITS

Code	Version
56418065	3 mm. gotele Kit
56418066	Japanese pastes Kit
56418067	Liquid stone Kit

Code	Version
56418418	Kit boquillas 4.5, 6 y 8 mm.

### Classic Gotele Gravity

With air inlet shut-off valve

Stone paints, gotele and viscous products

Code

10140202

### Classic XD Smooth



Code	Version
10141640	2.00[25] Multi-colours, products
10141641	2.50[36] Multi-colours

Special KITS for painting ceiling

Code

56418068



Product and air-flow regulators.

High quality 5L paint deposit with handle and removable lid for cleaning.

Includes 4.5, 6 and 8 mm aircaps.

Trigger lock system for ease of continuous use.

Non-stick coating in the body of the spray gun for ease of cleaning.

Air consumption: 170 L/min. at 3.5 bar.



Gotele

Stone paints

Japanese paste

Product and air-flow regulators.

Trigger lock system for ease of continuous use.

With air inlet shut-off valve.

Includes 4.5, 6 and 8 mm. aircaps.

5L paint deposit with handle.

Spray gun with 5L deposit and handle. Ideal for the application of viscous products frequently used in decoration, such as plastics or multicoloured.

Non-stick coating in the body in order to make cleaning easier.

#### TECHNICAL DETAILS

- > Air consumption: 280 L/min at 3.5 bar
- > Empty weight: 1,100 g

Recommendations for use:

Use diaphragm compressors and continuous airflow for the application of decoration products (gotele, pastes and dense products).



Premium 429 N



Classic Gotele Gravity



Classic XD Smooth



## 4001 Gotele Pressure, 4022 and Prmeium 419

### 4001 Gotele Pressure

Sturdy and minimum  
maintenance



Recommended pressure pots



Classic 30 Inox



Premium 30

High-performance gotele spray gun.

Stainless steel fluid nozzle and needle, for use with water-based products.

Great precision in droplet regulation.

Air consumption: 200 L/min. at 3.5 bar.

Code	Version	Application
20150701	2.80[2.8B]	Medium gotele, viscous products
20150702	2.20[2.2B]	Fine gotele
20150703	3.20[3.2B]	Coarse gotele, fine stone paints



Smooth paint,  
high viscosity



Goteles and Pastes



Stone pastes  
and Slurry



### 4022



Goteles and Pastes

Gotele spray gun.

Incorporates product coupling for flange and for 3/4" thread.

Stainless steel fluid nozzle and needle.

Air consumption: 200 L/min. at 3.5 bar.

Code	Version	Application
10151601	2.8	Gotele
10151602	3.2	Coarse gotele



### Premium 419

Ideal for stone pastes



Recommended pressure pots



Premium 30



Premium 60

Spray gun specially for stone pastes with air inlet shut-off valve. Includes 4.5, 6 and 8 mm aircaps.

Trigger lock system for ease of continuous use.

Non-stick coating in the body of the spray gun for ease of cleaning.

Air consumption: 90 L/min. at 2 bar.



Goteles and Pastes



Stone pastes  
and Slurry

Code	Version	Application
20151001	4.5 - 6 - 8	Stone paints





Pressure  
 pots

**610 pressure pot, Classic Lux pressure  
 and Classic 30 Inox pressure pot**

**610**

Pressure pot

Code

40000273

ATEX 2 II GX

Steel body and aluminium lid.

Top outlet.

Valid for solvent-based paints. Low and medium viscosity paints.

**TECHNICAL DETAILS**

- > 10 litre capacity
- > Steel body and aluminium lid
- > Without product agitator
- > Double regulation
- > Valid for solvent-based paints
- > Working pressure: max. 4 bar
- > Product outlet: 3/8"
- > Air inlet: 1/4"



**Classic  
 Lux  
 Pressure**

Full equipment

Code	Version
20151201	1.40 [21] Paints, basecoats
20151202	1.80 [21] Primers, acrylics
20151203	1.80 [27] Multi-colours
10540798	1.40 [21] Full equipment*



**\*Complete equipment (standard),  
 includes 610 pressure pot, Classic Lux Pressure  
 1.40 [21] and 5 m. product and air hose.**

Ideal for the application of mid to low viscosity paints. Valid for solvent-based paints.

Light, robust and versatile. Low air consumption. Stainless steel nozzle and needle.

Quick connector.

**TECHNICAL DETAILS**

**Pressure version**

- > Weight: 432 g
- > Air consumption: 21 Aircap: 315 L/min.  
 27 Aircap: 195 L/min.

**Classic  
 30 Inox**

With handlebar,  
 foldable for transport

Code

20530702

ATEX 2 II GX

30 L. pressure pot. (two bags of 25 kg. of paste). With handlebar, foldable for transport. Handle grip.

**TECHNICAL DETAILS**

- > Maximum working pressure: 7 bar
- > Bottom-mounted product outlet 3/4"
- > Empty weight: 31 kg.



Optional air-flow  
 regulator



## Turbo 2200 Pro, Sagola 455 and Turbo 1000 Turbines

# TURBO 2200PRO

Large fan size

Stainless steel needle and nozzle

2-stage turbine equipment

Code	Version
30640401	Full Equip. 220 V / 50 Hz
30640402	Full Equip. 120 V / 60 Hz

Code	Version
56418663	Consumable: turbine filter kit 6 units

# 455

Large fan size

Stainless steel needle and nozzle

Special spray gun for turbines



# TURBO1000

## TECHNICAL DETAILS

- > 220 V / 50 Hz - 120 V / 60 Hz
- > Power: 1,000 w
- > Max. pressure: 0.28 bar
- > Weight: 5.2 kg

Code	Version
49000312	Aluminum deposit Spray gun

Autonomous Turbine Equipment for all type of industry, with a power of 1,300 w.

Excellent atomization. Ideal for painting and assemblies works.

Metallic spray gun with fan and product regulator.

Deposit with anti-return valve, flange closure and anti-drip lid.

Removable double air filter.

Metallic spray gun with fan and product regulators.

Deposit with anti-return valve, flange closure and anti-drip lid.

Excellent atomization.

Ideal for painting and assemblies works.

Professional HVLP autonomous tool. Minimum mist.

Turbine unit valid for all types of paints, finishes, primers, multi-colours (includes two nozzle combinations as standard equipment).

Gun holder, cable reel and accessory holder.

Includes removable air filter.



## TECHNICAL DETAILS

- > Electric motor: 220 V - 50 Hz  
110 V - 60 Hz
- > Power: 1,300 w
- > Free flow: 2,000 L/min.
- > Maximum pressure: 0.3 bar
- > Weight: 10 kg
- > Transfer: 75%



## Combinations SAGOLA 455 Spray Gun

Code	Version	Application
10110501	1.40 [80]	Finishes, basecoats and primers
10110502	1.00 [80]	High gloss finishes and dyes
10110503	1.20 [80]	General finishes.
10110505	1.80 [80]	Viscous products, primers, acrylics.
10110506	2.20 [80]	Textured products, cast iron effect.



Code	Version
40000318	Full Equip. 220 V / 50 Hz
40000497	Full Equip. 120 V / 60 Hz

**Classic S1, Classic S1 Venturi blowers and Classic P1**


# Classic S1

Blowgun

Made of aluminum

Light and robust

Code	Version
20340601	Metallic aircap
20340604	With extension
20340603	Plastic aircap

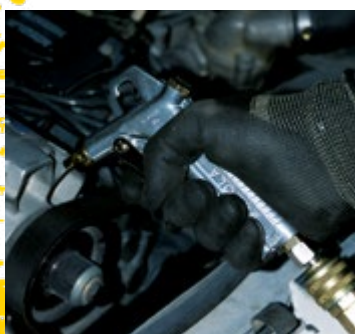

Three versions of the blow gun Classic S1:

- Classic S1 with metallic aircap.
- Classic S1 with extension.
- Classic S1 with plastic aircap.

Blowgun with body built in aluminum. Light but robust.

### TECHNICAL DETAILS

- > Plastic/metallic/extension Aircap
- > Weight: 187/190/198 g
- > 1/4" male coupling
- > Air consumption: 240 L/min. at 6 (air inlet pressure)
- > Working pressure: 3 bar - 10 bar
- > Maximum pressure: 10 bar



Classic S1  
Metallic aircap



Classic S1  
With extension



Classic S1  
Plastic aircap



**X4**  
MULTIPLIED  
AIR FLOW

# Classic S1 Venturi

Blowgun

made of aluminum

Venturi System

High Air flow

Code

20340605

### TECHNICAL DETAILS

- > Metallic Aircap
- > Weight: 225 g
- > 1/4" male coupling
- > Air consumption: 240 L/min. at 6 (air inlet pressure)
- > Air outlet: 925 L/min. at 6 bar
- > Working pressure: 3 bar - 10 bar
- > Maximum pressure: 10 bar

# Classic P1

Metalic aircap

Adjustable flow

Code

20340701

### TECHNICAL DETAILS

- > 1L rapid closure deposit.
- > Metalic aircap
- > Adjustable flow
- > 1/4" male coupling.
- > Air consumption: 146 L/min. at 6 bar (air inlet pressure).
- > Working pressure: 3 bar. - 10 bar.
- > Maximum pressure: 10 bar
- > Weight: 770 g.



**Classic I Plus, Classic I 2 Inflating gun and 416**

**Classic  
I Plus**  
Inflating gun

Code

10310201



Professional inflating gun - pressure checker.  
Manufactured in aluminium.  
Maximum robustness and reliability.

**TECHNICAL DETAILS**

- > Hose length: 0.5 m
- > Working pressure: 0 - 10 bar
- > Shock-protected pressure gauge
- > Weight: 800 g



**Classic  
I 2**

Code

40000494

Inflating gun - pressure checker.  
Shock-protected pressure gauge.

**TECHNICAL DETAILS**

- > Hose length: 0.3 m
- > Working pressure: 0 - 10 bar
- > Weight: 546 g



**416**

Code

20330401

Pneumatic gun for antigravel cartridges and  
underbody protection. Operation by suction.

Gun for the application of standardized acoustic  
insulation 1 L. cartridges. To be screwed directly to  
the cartridge.

Adjustable metallic aircap to control the quantity  
and texture of the product.

**TECHNICAL DETAILS**

- > Empty weight: 520 g
- > Connection: 1/4" male coupling
- > Air consumption: 160 L/min at 3.5 bar air pressure
- > Working pressure: 3 bar - 10 bar
- > Maximum pressure: 10 bar



**Selladoras 3900 Plus and 3900 Plus M4/6**



**3900  
PLUS M6**



**3900  
PLUS M4**



**3900  
PLUS**



**3900 PLUS**

**Sturdy aluminum body**

**Quick Closing**

**Metal air distributor**

**Discharge valve**

**1/4" Standard Connection**

**3900 Plus**

Code

10330201

**3900 Plus M4**

Code

10330401

**3900 Plus M6**

Code

10330402

The new 3900 Plus pneumatic sealers are a compact, efficient and light solution for everyday needs in any workshop. These pneumatic guns are very useful when it comes to structure assembling, repairs and windshield set-ups, amongst others.

There are two versions: the 3900 Plus for sealants in cartridges and the 3900 Plus M for sealants in sausages. Both versions include a trigger with discharge valve, which guarantees a great precision and control.

The metallic internal parts assure a long working life. Besides, those parts do not require any manipulation neither any maintenance.

Its body is made of high resistance aluminum. The front part on the 3900 Plus is made of non-deformable plastic.

The 3900 Plus sealers are a very strong product capable to work for long working hours.

**TECHNICAL DETAILS 3900 PLUS - CARTRIDGE**

- > Front part made in plastic.
- > Bead application of sealers and silicone in 300 ml. cartridges.
- > 1/4" Air inlet
- > Weight: 540 g / Length: 250 mm
- > Working pressure: 4 - 6 bar
- > Discharge valve to shut-off the product outlet when releasing the trigger.

**TECHNICAL DETAILS 3900 PLUS M - SAUSAGE**

- > Front part made in anodized aluminum.
- > Bead application of sealers and silicone in sausage: 300 & 400 ml. **3900 PLUS M4** 600 ml. **3900 PLUS M6**
- > 1/4" Air inlet
- > **3900 PLUS M4:** Weight: 560 g / Length: 250 mm
- > **3900 PLUS M6:** Weight: 570 g / Length: 320 mm
- > Working pressure: 4 - 6 bar
- > Discharge valve to shut-off the product outlet when releasing the trigger.



## Classic 414, Classic 418 and Adhesives pressure

# Classic 414

Pneumatic operation

Code

20330502



Hand-held pistol for sand blasting to stipple or clean parts.

Consumption: approx. 280 L/min. Max. recommended working pressure 5 bar.

2 product caps:

> Metallic, 5 mm.

> Special high-strength ceramic material: 6 mm.



# Classic 418

Code

20330501

Hand-held gun for application of polyurethane foam.

Includes a needle closing paint regulator.



# Adhesives pressure

For bead application of  
white glues and adhesives

Code

10151401





Especially for bead applications of glues and adhesives. White glue application for the wood industry.


Teflon-coated body makes cleaning easy.

Incorporates a series of 1 and 2 mm. caps and product flow regulator.


The 3 mm. aircap, scoring aircap (to mark lines) and 4-aperture aircap (to apply glue to cavities) can be acquired as options.

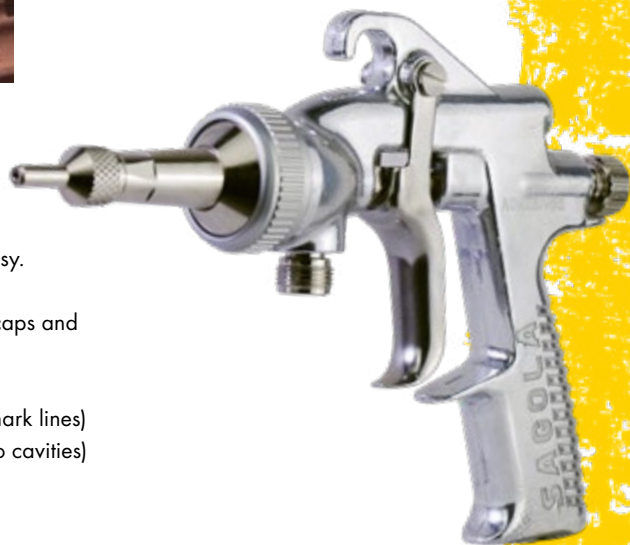

(Ø1) SCOLAS - SG418030  
(Ø2) SCOLAS - SG418026  
(Ø3) SCOLAS - SG418027



(Ran) SCOLAS - SG418029



(Ø4) SCOLAS - SG418028

**Plus filters range**



**479  
PLUS**

Large air flow, highly reliable regulating system, high quality pressure gauge, the best materials. Do not undervalue your small painting works or reduce the life of your pneumatic tools by using poor quality regulators with no filtration capacity. Adaptable to any size of hose. It comes with reducers. Produced from a solid aluminium block, great filtration capacity with check window for waste particle and semi-automatic drain system, it has everything in a minimum space.

Code	Version
10730401	1/2"
10730402	3/8"
10730403	1/4"



**970  
PLUS**

The virtues of the regulator-filter 479 is now united to a lubricating element, setting itself apart as specific workshop equipment. It supplies clean, lubricated air to all your tools.

Accurate control of the oil content by means of a "drop-by-drop" hand regulator, zero pressure loss thanks to the in-line design, maximum reliability and productivity in the most compact package.

Code	Version
10750301	1/2"
10750302	3/8"
10750303	1/4"

**TECHNICAL DETAILS**

- > Dimensions: 229 x 73 x 115 mm
- > Weight: 886 g
- > Brass filter: 40 microns
- > Air flow: 1.700 L/min
- > Couplings: 1/2", 3/8", 1/4"
- > Max. working pressure: 10 bar
- > Draining system: semi-automatic



**The most compact solution for  
the small workshops, industry or  
priming and preparation areas**

**TECHNICAL DETAILS**

- > Dimensions: 229 x 148 x 115 mm
- > Weight: 1,450 g
- > Brass filter: 40 microns
- > Air flow: 1,700 L/min
- > Connections: 1/2", 3/8", 1/4"
- > Maximum working pressure: 10 bar
- > Draining system: semi-automatic



**Maximum reliability**

**Assure the supply of clean and properly  
lubricated air to tools and pneumatic engines**

**Regulator  
430  
PLUS**

Code	Version
10740501	1/2"
10740502	3/8"
10740503	1/4"



**High precision**

**Air filter  
439  
PLUS**

Code	Version
10720401	1/2"
10720402	3/8"
10720403	1/4"



**Lubricator  
437  
PLUS**

Code	Version
10710301	1/2"
10710302	3/8"
10710303	1/4"



**TECHNICAL DETAILS**

- > Dimensions: 107 x 65 x 115 mm
- > Weight: 544 g
- > Air flow: 1,200 - 1,700 L/min
- > Couplings: 1/2", 3/8", 1/4"
- > Max. working pressure: 10 bar



**TECHNICAL DETAILS**

- > Dimensions: 158 x 73 x 73 mm
- > Weight: 553 g
- > Air flow: 1,700 L/min
- > Couplings: 1/2", 3/8", 1/4"
- > Max. working pressure: 10 bar
- > Draining system: semi-automatic



**TECHNICAL DETAILS**

- > Dimensions: 165 x 73 x 73 mm
- > Weight: 482 g
- > Oil filter
- > Air flow: 1,920 L/min
- > Couplings: 1/2", 3/8", 1/4"
- > Max. working pressure: 10 bar



**FR, FRL and RA**



**FR**  
Air-flow  
regulator

Painting or blasting lines in the metal, wood, plastic, ceramic etc. industries.

Air filtration and regulation for machinery in general where a supply of clean air is required.

Code	Version	Model
40000181	1/2" F - BSP	FR 404
40000180	3/8" F - BSP	FR 303
40000179	1/4" F - BSP	FR 302

**TECHNICAL DETAILS**

- > Flow 1,500 L/min.(FR303, FR302)
- > Flow 2,050 - 2,100 L/min. (FR404)
- > Dimensions: 53 x 211 mm. (FR303, FR302)
- > Dimensions: 70 x 262.5 mm. (FR404)
- > Filter of particles larger than 40 microns
- > Centrifugal water filtration.
- > Semi-automatic draining system.
- > High precision regulation.
- > Deposit capacity: 30 cm<sup>2</sup>.
- > Polycarbonate deposit with metallic protection.
- > Operating temperature: -10 to 60°C.



**FRL**  
High air-flow  
regulating filter

Compact line. Clean, filtered air and lubrication suitable for all types of machinery provided with pneumatic motors.

Extends the life and optimises the performance of pneumatic machinery.

**FRL 404:** recommended for high air consumption tools and motors and for working with several tools at one time.

Code	Version	Model
40000224	1/2"	FRL 404
40000223	3/8"	FRL 303
40000222	1/4"	FRL 302

**TECHNICAL DETAILS**

**FRL 404 (high flow)**

- > Dimensions: 154 x 262.5 mm.
- > Incorporates the following elements: FA 404 regulating filter + LA 4040 lubricator.

**FRL 303 and 302**

- > Dimensions: 117 x 211 mm.
- > Incorporates the following elements: FA 303 regulating filter + LA 303 lubricator.
- > Incorporates the following elements: FA 302 regulating filter + LA 302 lubricator.



**RA**  
High precision  
air-flow regulator

Constant pressure and flow for all types of machinery.

Quality pressure gauge incorporated.

Code	Version	Model
40000187	1/2" F - BSP	RA 404
40000186	3/8" F - BSP	RA 303
40000185	1/4" F - BSP	RA 302

**TECHNICAL DETAILS**

- > Dimensions: 53 x 127.5 mm (RA404) / 70 x 149.5 mm (RA303/302)
- > Working pressure range: 0 - 10 bar
- > Air flow: (RA303/302) 1,500 L/min.  
(RA404) 2,050 - 2,100 L/min.

## Quick Couplings

### FEATURES

#### NEW RANGE

#### Couplings and connectors




Max. pressure: 25 bar  
Europerfil max. pressure: 15 bar  
Aluminum plugs max. pressure: 20 bar

The new range of plugs SAGOLA presents cutting-edge design. SAGOLA offers a wide range that gives cover 100% of market requirements. Is incorporated security versions. All steel and aluminum plugs are BSP; Males (BSPT) and females (BSPP).

Plug body made of treated steel and valve made of brass. So a guaranteed life of more than 1,500,000 uses. The new range of plugs SAGOLA incorporates a handle made of composite, which gives a high resistance to both attrition and drag. Attrition resistance tested in more than 48,000 impacts and the equivalent to a crawl 12 km.

1. **SHOOTER** made of composite with a weight reduction and extraordinary durability against impact (48,000 impacts test).
2. **BODY PLUG** made of steel with anticorrosive treatment.
3. **VALVES** Brass valve manufactured, specific to work at high temperatures.
4. **JOINTS** Nitrile Butadiene. Operating temperature range: -20°C +100°C.
5. **PINS** made of tempered high strength steel that guarantees the absence of attrition.
6. **SPRING** made of stainless steel.

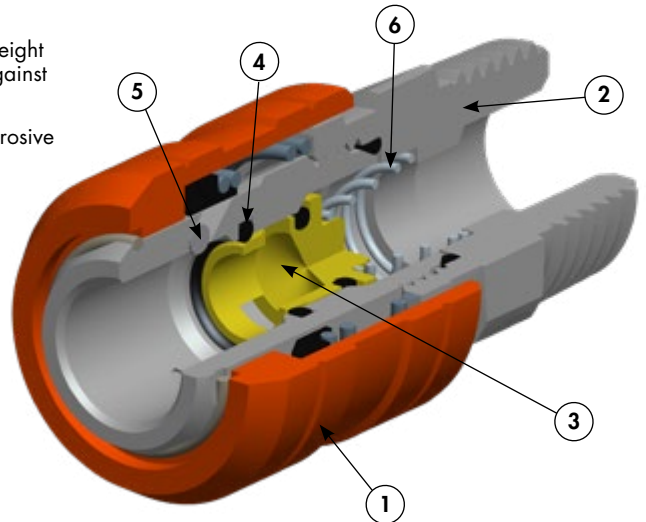

### US-Mil range

Air coupling: 1/4" Flow: 68 m<sup>3</sup>/h. - 1,133 L/min.

#### US-Mil RANGE

Simple shutter plug, made of hardened steel with gasket made of Nitrile Butadiene. Its excellent sealing prevent dirt penetrates inside. High strength sleeve.



Code	Version
11010524	BSPT 1/4"
11010525	BSPT 3/8"
11010526	BSPT 1/2"
11010527	BSPT 1/4" 25 Units



Code	Version
11010424	BSPP 1/4"
11010425	BSPP 3/8"
11010426	BSPP 1/2"
11010427	BSPP 1/4" 25 Units



Code	Version
11010624	8 mm. barb.
11010625	10 mm. barb.
11010626	8 mm. barb. 25 Units

### US-Mil range

### Safety plug

Air coupling: 1/4" Flow: 68 m<sup>3</sup>/h. - 1,133 L/min.

#### US-Mil RANGE

Plug with gasket made of Nitrile Butadiene and double effect opening. Anti-whiplash safety plug according to ISO-4414. Two movements "push-pull" to disconnect. High strength sleeve.



Code	Version
11010528	BSPT 1/4"
11010529	BSPT 3/8"
11010530	BSPT 1/2"



Code	Version
11010428	BSPP 1/4"
11010429	BSPP 3/8"
11010430	BSPP 1/2"



Code	Version
11010627	8 mm. barb.
11010628	10 mm. barb.

### Euro-Profile range

Air coupling: 7.6 mm. Flow: 85 m<sup>3</sup>/h. - 2,000 L/min.

#### Euro Perfil RANGE

Simple shutter plug, made of hardened steel with gasket made of Nitrile Butadiene. Its excellent sealing prevent dirt penetrates inside



Code	Version
11010823	BSPT 1/4"
11010824	BSPT 3/8"
11010825	BSPT 1/2"



Code	Version
11010723	BSPP 1/4"
11010724	BSPP 3/8"
11010725	BSPP 1/2"



Code	Version
11010924	8 mm. barb.
11010923	10 mm. barb.

### Euro-Profile range

### Safety plug

Air coupling: 7.6 mm. Flow: 85 m<sup>3</sup>/h. - 2,000 L/min.

#### Euro Perfil RANGE

Plug with gasket made of Nitrile Butadiene and double effect opening. Anti-whiplash safety plug according to ISO-4414. Two movements "push-pull" to disconnect. High strength sleeve.



Code	Version
11011323	BSPT 1/4"
11011324	BSPT 3/8"
11011325	BSPT 1/2"



Code	Version
11011423	BSPP 1/4"
11011424	BSPP 3/8"
11011425	BSPP 1/2"



Code	Version
11011523	8 mm. barb.
11011524	10 mm. barb.

## Quick Couplings, Threaded Couplings

### Multi-Profile range

3x1 system. Compatibility: US-MIL/EURO-PROFILE/ITALIAN PROFILE

#### Multi-Profile RANGE

Flow: 85 m<sup>3</sup>/h. - 2,000 L/min.  
Simple shutter plug, made of steel with gasket made of Nitrile Butadiene. Its excellent sealing prevent dirt penetrates inside. Air coupling: 8 mm.

Code	Version	Code	Version	Code	Version
11010826	BSPT 1/4"	11010726	BSPP 1/4"	11010925	8 mm. barb.
11010827	BSPT 3/8"	11010727	BSPP 3/8"	11010926	10 mm. barb.

### Nitto range

#### Nitto RANGE

Flow: 85 m<sup>3</sup>/h. - 2,000 L/min.  
Simple shutter plug, made of steel with gasket made of Nitrile Butadiene. Its excellent sealing prevent dirt penetrates inside. Air coupling: 8 mm.

Code	Version	Code	Version	Code	Version
11011701	BSPT 1/4"	11011801	BSPP 1/4"	11011901	8 mm. barb.
11011702	BSPT 3/8"	11011802	BSPP 3/8"	11011902	10 mm. barb.

### US-Mil range

### ULTRA LIGHT

Ultra-Light range. Ultra-lightweight. 45 g.

#### US-Mil RANGE

Flow: 68 m<sup>3</sup>/h. - 1,133 L/min.  
Body and shooter made of high strength aluminum. Valve made of brass. Pins made of high strength steel.  
Air coupling: 1/4"

Code	Version	Code	Version	Code	Version
11010531	BSPT 1/4"	11010431	BSPP 1/4"	11010629	8 mm. barb.

### FEATURES Couplings and connectors SIZE 2

The size 2 plug is the most commonly used push plug in paint and body shops, and also in industry for the connection of all kinds of pneumatic tools. Silicone free.  
All springs, valves and pins made of stainless steel. All SAGOLA connectors are manufactured in high carbon steel making them extremely strong and stress resistant.

### US-Mil range

**US-Mil-Spec C-4109 RANGE** - 600 L/min  
Versatile. Simple blocking plug made of brass with Buna N gasket. Its excellent sealing avoids the penetration of impurities to the inside. Fully compatible with earlier lines of SAGOLA plugs.

Code	Version	Code	Version	Code	Version
11010520	BSPP 1/4"	11010420	BSPP 1/4"	11010621	8 mm. barb.
11010521	BSPP 3/8"	11010421	BSPP 3/8"	11010622	10 mm. barb.
11010522	BSPP 1/2"	11010422	BSPP 1/2"	11010623	8 mm. barb.
11010523	BSPP 1/4" <b>25 Units</b>	11010423	BSPP 1/4" <b>25 Units</b>		

### US-Mil range

Connector without blocker, made of steel.

#### US-Mil-Spec C-4109 RANGE

(2 units) ID 5.5 mm.  
Fully compatible with earlier lines of SAGOLA plugs. Made of high-carbon steel. Anti-corrosive nickel etched finish. Connector without blocker.

Code	Version	Code	Version	Code	Version
11020420	BSPT 1/4"	11020520	BSPP 1/4"	11020621	8 mm. barb.
11020421	BSPT 3/8"	11020521	BSPP 3/8"	11020622	10 mm. barb.
11020422	BSPT 1/2"	11020522	BSPP 1/2"	11020623	8 mm. barb.
11020423	BSPT 1/4" <b>50 Units</b>	11020523	BSPP 1/4" <b>50 Units</b>		
		11020524	BSPP 1/4" <b>50 Units</b>		

### Euro-Profile range

Maximum performance and durability in high production workshops.

#### Euro Profile RANGE (2 units)

High flow. ID 7-8 mm.  
Made of high-carbon steel. Anti-corrosion blue galvanized finish. Connector without blocker.

Code	Version	Code	Version	Code	Version
11020710	BSPT 1/4"	11020810	BSPP 1/4"	11020921	8 mm. barb.
11020721	BSPT 3/8"	11020821	BSPP 3/8"	11020922	10 mm. barb.
11020722	BSPT 1/2"	11020822	BSPP 1/2"		

### Nitto range

#### Nitto RANGE (2 units)

High flow. ID 7-8 mm.  
Made of high-carbon steel. Anti-corrosion blue galvanized finish. Connector without blocker.

Code	Version	Code	Version	Code	Version
11021001	BSPT 1/4"	11021101	BSPP 1/4"	11021201	8 mm. barb.
11021002	BSPT 3/8"	11021102	BSPP 3/8"	11021202	10 mm. barb.

## Quick Couplings, Threaded Couplings

### PLUGS (1 unit)



Used mainly in industry for particular applications due to size, air flow etc.

Size 1: special small size. Flow T1: 450 L/min.

Special SIZES 1, 3, and 4

Sizes 3 and 4: special for high flows. Large threads and barbs. Flows of T3 (1,200 L/min) and T4 (2,400 L/min).



#### US-Mil range

Size	Code	Version	Size	Code	Version	Size	Code	Version		
	1	11010210	BSPT 1/8"	1	11010110	BSPP 1/8"		1	11010310	6 mm. barb.
	1	11010211	BSPT 1/4"	1	11010111	BSPP 1/4"		1	11010311	8 mm. barb.
	3	11010230	BSPT 3/8"	3	11010130	BSPP 3/8"		3	11010330	13 mm. barb.
	3	11010231	BSPT 1/2"	3	11010131	BSPP 1/2"		3	11010331	15 mm. barb.
	4	11010240	BSPT 1/2"	4	11010140	BSPP 1/2"		4	11010340	16 mm. barb.
	4	11010241	BSPT 3/4"	4	11010141	BSPP 3/4"		4	11010341	20 mm. barb.

### CONNECTORS (2 units)





Made of high carbon steel.

#### US-Mil range

Size	Code	Version	Size	Code	Version	Size	Code	Version		
	1	11020210	BSPT 1/8"	1	11020110	BSPP 1/8"		1	11020310	6 mm. barb.
	1	11020211	BSPT 1/4"	1	11020111	BSPP 1/4"		1	11020311	8 mm. barb.
	3	11020230	BSPT 3/8"	3	11020130	BSPP 3/8"		3	11020330	13 mm. barb.
	3	11020231	BSPT 1/2"	3	11020131	BSPP 1/2"		3	11020331	15 mm. barb.
	4	11020240	BSPT 1/2"	4	11020140	BSPP 1/2"		4	11020340	16 mm. barb.
	4	11020241	BSPT 3/4"	4	11020141	BSPP 3/4"		4	11020341	20 mm. barb.

### Threaded couplings

Code	Version	Application
11000101	BSPT	Coupling 1/4" M-M (2 units)
11000102	BSPT	Coupling 1/2" M-M (2 units)
11000103	BSPT	Coupling 3/8" M-M (2 units)
11000104	BSPT	Coupling 1/2" M at 3/8" M (2 units)
11000105	BSPT	Coupling 3/8" M at 1/4" M (2 units)
11000112	BSPT	Coupling 1/2" M at 3/8" F (2 units)
11000113	BSPT	Coupling 1/2" M at 1/4" F (2 units)
11000106	BSPP	Coupling 1/2" F at 3/8" M (2 units)
11000107	BSPP	Coupling 3/8" F at 1/4" M (2 units)
11000108	BSPP	Coupling 3/8" M at 1/4" F (2 units)
11000109	BSPT	Coupling 1/2" M at 8mm barb (2 units)
11000110	BSPT	Coupling 3/8" M at 8mm barb (2 units)
11000111	BSPT	Coupling 1/4" M at 8mm barb (2 units)



Plugs and connectors are  
supplied in individual blister packs



## Product and Air hoses

### Anti-static compressed air hose

Ideal for painting in the booth  
Light, flexible and manageable  
Twist free

Code	Version
56414014	2.5 m. 6x12mm F/F 1/4"
56414024	6 m. 8x15mm F/F 1/4"
56414025	11 m. 8x15mm F/F 1/4"
56414027	16 m. 8x15mm F/F 1/4"
56414026	26 m. 8x15mm F/F 1/4"



Anti-static EPDM rubber hose with exterior textile reinforcement. Ideal for painting in the booth. High security couplings with trigger mechanism which stands up to high booth temperatures. Avoids the use of flanges that could loosen or cause leaks due to dilation.

#### TECHNICAL DETAILS

- > Working temperature: - 40°C to +120°C
- > Working pressure: 20 bar
- > Breaking strain 80 bar
- > Anti-stick exterior
- > Internal diameter 8 mm. Valid for working with HVLP high flow guns
- > Meets Directive 97/23/CE
- > 1/4" F couplings with conical closure and flare fitting for easy assembly of the push connector
- > Conducting pipe < 1 M Ω
- > Max. temperature: 120°C
- > Tough (breaking strain 80 bar)

### 100 m roll of hose

Multi-use hose

Meets Directive 97/23/CE

Code
52450008

Compact with excellent performance and oil resistance.

#### TECHNICAL DETAILS

- > 8x15 air hose in 100 metre rolls
- > Thermal cork hose with exterior polyester reinforcement
- > Working pressure: 20 bar
- > Breaking strain 60 bar
- > Working temperature: -15°C to 60°C



### PU hose spiral



Polyurethane hose extensions.  
Highly flexible and torsion resistant.

#### TECHNICAL DETAILS

- > Hose 1/4 M + 6.5 x 9.5 mm.
- > Couplings 1/4" M
- > Sprung terminals
- > Internal diameter 6.5 mm.

Code	Version
40000266	7 m. 1/4" M, 6,5x9,5 m. hose (30-units box)
52450022	7m. 1/4" M, 6,5x9,5 m. hose (unit)
40000267	10 m. 1/4" M, 6,5x9,5 m. hose (25-units box)
52450023	10 m. 1/4" M, 6,5x9,5 m. hose (unit)



### Antistatic PRODUCT hose for Pots and DM Aerographics. 8x16 mm. F+F. 3/8". Waterborne/Solvent

Code	Version
56414116	6 m. Antistatic Product hose
56414117	11 m. Antistatic Product hose
56414115	16 m. Antistatic Product hose

### Aerographic PRODUCT hose for Pots. High viscosity 20x26 mm. F+F. 3/4". Waterborne

Code	Version
56414111	5 m. Aerographic Product hose
56414112	10 m. Aerographic Product hose
56414113	15 m. Aerographic Product hose
56414101	5 m. Aerographic Product hose. 25x33 mm. Kit Kamlock. Waterborne

### Air + product hose set + cover. Aerographics

Ligeras. Antiestatic AIR hose. 8x15 mm.  
PRODUCT hose with adapter 3/8"

Code	Version
56414039	5 m. Air + product hose set 6x8 mm. + cover
56414044	7,5 m. Air + product hose set 6x8 mm. + cover
56414040	10 m. Air + product hose set 6x8 mm. + cover
56414041	15 m. Air + product hose set 6x8 mm. + cover
56414042	20 m. Air + product hose set 6x8 mm. + cover

### Spray gun AIR + PRODUCT hose

Code	Version
86463818	5 m. Aerographic hose (6 mm. + 8 mm.). HVLP
86463819	10 m. Aerographic hose (6 mm. + 8 mm.)
86463891	10 m. Aerographic hose (8 mm. + 10 mm.). Adhesives
86463894	5 m. Aerographic hose (8 mm. + 3 mm.). Dyes

## Mascarillas FFP2, Classic MP2 and MP 300



### Masks FFP2

#### Self-filtering paper masks

Code	Version
40000263	M200
40000264	M210 with valve



M210 model



M200 model

For solid and liquid particles of low and medium toxicity. For use against non-ferrous metal dust, welding metal fumes, gasses and mists NOT INCLUDING materials such as lead, aluminium and manganese.

Double elastic tape. Flexible metallic strip for adjustment to nose, area.

NPF (nominal protection factor): 12 (concentration permitted in the atmosphere 12 times the TLV)

#### TECHNICAL DETAILS

##### M200 Model

> Comes in a 20-unit box.

##### M210 Model

> Comes in a 10-unit box.

> Built-in exhalation valve to make breathing easier.

## Classic MP2

Mask with double charcoal filter against organic and solvent fumes

Facial housing of thermoplastic rubber

Elastic tape fastener

Code

14810201



Double air inlet, allowing higher flow inhalations, for easier breathing.

Each of the built-in chemical filters of the mask is classified as "filter against fumes, A type, class 1" according to EN 141, and are also certificated separately.

79mm diameter cylinder shape filter.

Approved: FBC – 9086 A.

#### TECHNICAL DETAILS

> Breathing resistance:

To air Flow 25 x 2 L/min

To inhalation: 0.52 mbar

To exhalation: 1.64 mbar

> To continuous flow inhalation:

30 L/min flow: 0.11 mbar

95 L/min flow: 0.33 mbar

> CO2 content (death space): 0.60%

> Escapes to the interior (hermeticity): < 2

SPARE Paint filter against organic and solvent fumes. 10 units.

Classic MP2 and MP300 models.

Code

56418052

## MP300

Mask with double charcoal filter against organic and solvent fumes

Facial housing of thermoplastic rubber

Elastic tape fastener

Code

14810301

Double air inlet, allowing higher flow inhalations, making easier to breathe.

Suitable to be used in atmospheres contaminated with fumes and vapours with a boiling point over 65°C, like solvents and paints, offering a proper protection (with oxygen content in the air over 17% in volume).

Each of the built-in chemical filters of the mask is classified as "filter against fumes, A type, class 1" according to EN 141, and are also certificated separately.



Approved  
 FCB-9086 A  
 EN 140



## 1200 X polisher, L series sanders, Scissor Rack

# 1200 X Polisher

Electric angular polisher,  
electronic

Code

40000507

Code

Polishing beret

49000109

Code

Polishing plate

49000110

For polishing tasks on  
vehicles, wood and decoration.

### TECHNICAL DETAILS

- > Voltage: 220 V/ 50 Hz
- > Power: 1,200 w
- > Disk: 180 mm.
- > Adjustable speed: 600 - 3,000 rpm.
- > Weight: 3.2 kg.



# L Series sanders

High performance sanders

Extremely high finish quality

Light, compact and powerful

No surface  
contamination

If you are looking for scratch-free quality, you can  
trust the "L" range.

Designed for comfortable operation, "L" range  
sanders are the reference in low vibration and  
high performance tools.

Code	Version
40000232	L505 Pneumatic Orbital Sander for cutting down and quick setting
40000231	L252 Pneumatic Orbital Sander for quality finishes
40000230	L252R Pneumatic Orbital Sander for fine finishes, small size



# Scissor Rack

Manageable and light

Code

40000250

Holder for parts under repair or painting with  
sponge rollers to avoid damage to parts.

Curved legs designed for use on grid floors.



### Air flow regulators

#### Flow regulator RC2

Pressure gauge flow regulator. Exact input pressure gun.

High quality gauge green scale for high transfer guns.

Code

40000335



#### Air flow regulator kit

Accurate and economical.

Válid for pneumatic tools and gear.

Code

56418417



#### Magnetic Stands SP1 and SP2

Magnetic stand for 1 (SP1) or 2 (SP2) spray guns. Solvent-proof paint. Supports PPS type adapters. Maximum robustness. High holding power due to two powerful magnets.

Code

40000245  
40000246

Version

SP1  
SP2

SP1 Model

SP2 Model



#### Ford 4 viscosimeter

Code

56418001



### Accessories for cleaning and maintenance

#### Cleaning kit

Complete cleaning set, including one brush for outside cleaning, and rods of different sizes for all the inner paths of the spray gun. Supplied in a practical show case.

Code

40000086



#### Lubricant grease

Natural grease, specially made for spray guns and painting equipments moving parts lubrication. High consistency, even under extreme temperatures. Long lasting, it doesn't lose properties over the time. Easy to open 100 ml. can.

Code

56418589



### Gravity deposits and Filters

Code	Name
<b>KITS ACCESORIOS - Pistolas Gravedad</b>	
56418084	0.65 L. Gravity Deposit Kit - without filter
56418085	0.65 L. Gravity Deposit Kit (4100Xtreme, 3300GTO, ClassicPro XD)
56418420	0.65 L. Gravity Deposit Kit (Classic Lux)
56418479	5 Product Filter Kit (Gravity) (474)
56418017	5 Product Filter Kit (Gravity) (Classic Lux)



### Suction Deposit Gaskets and Filters

Code	Name
<b>KITS ACCESORIOS - Suction spray guns</b>	
56418074	Suction Deposit 4100/3300GTO/Classic Pro XD
56418014	10 Product Filter Kit (Suction)
56418013	5 Suction Spray Gun Anti-drip Lid Kit
56418509	Deposit Closure Flanged Washer



#### Pressurizer kit for gravity spray guns.

Gravity cup pressure kit for high viscosity materials spraying. Non-return valve included.

Code

56418513



Code

56418481  
56418494

Name

#### OTHER KITS AND ACCESSORIES

Air Valve Kit 3300 GTO, 4100 GTO  
Air Gasket Replacement Kit (6 units)  
4100/3300 GTO/Classic Pro XD



The **aircap model** is vital to achieve the desired results. The type of product we are going to apply and the application system we are going to use must both be taken into account when selecting an aircap. Correctly combining the aircap with the adequate nozzle and needle kit, the desired spray quality will be obtained.

## High transfer aircaps

Code	Aircaps	Spray gun model	System Transfer	Application	Nozzle+Needle mm.	Air consumption L/min. (2 bar)	flow g/min.	Fan pattern average mm.
56418558	<b>GTO EVO</b>	<b>3300 GTO</b>	<b>EPA 65%</b>	High gloss finishes, basecoats.	1.3 - 1.6	255	175	280
56418645	<b>GTO EPA</b>	<b>3300 GTO</b>	<b>EPA 65%</b>	Finishes and primers. Minimum air consumption.	1.4 - 1.8	240	160	275
56418552	<b>GTO HVLP</b>	<b>3300 GTO</b>	<b>HVLP 72%</b>	Finishes and fillers. Minimum mist, maximum savings. 0.7 bar at aircap.	1.4 - 1.8	380	130	250
56418279	<b>21 EPA</b>	<b>Classic Pro XD</b>	<b>EPA 65%</b>	Finishes, primers	1.4 - 1.8	210	200	250

## Conventional Spray Aircaps

Code	Aircaps	Spray gun model	System Transfer	Application	Nozzle+Needle mm.	Air consumption L/min. (2 bar)	flow g/min.	Fan pattern average mm.
56418278	<b>15</b>	<b>Classic Pro XD</b>	<b>Conv. 50%</b>	Finishes, primers	1.4 - 1.8	180	200	230
56418280	<b>25</b>	<b>Classic Pro XD</b>	<b>Conv. 50%</b>	Thick primers.	2,0	260	200	300
56418282	<b>36</b>	<b>Classic Pro XD</b>	<b>Conv. 50%</b>	Intermediate coats, thick products, glues.	2,5	320	300	285
56418281	<b>28</b>	<b>Classic Pro XD</b>	<b>Conv. 50%</b>	High viscosity, gun-applied mastics, cast iron effect.	2,8	320	350	260

## Nozzle + Needle Kit

Code	Name	Spray Gun Range
10011187	Nozzle + Needle Kit 1.0	3300 GTO, 3300 Pro, 3200, Classic Pro
10011180	Nozzle + Needle Kit 1.2	3300 GTO, 3300 Pro, 3200, Classic Pro
10011191	Nozzle + Needle Kit 1.3	3300 GTO, 3300 Pro, 3200, Classic Pro
10011181	Nozzle + Needle Kit 1.4	3300 GTO, 3300 Pro, 3200, Classic Pro
10011182	Nozzle + Needle Kit 1.6	3300 GTO, 3300 Pro, 3200, Classic Pro
10011183	Nozzle + Needle Kit 1.8	3300 GTO, 3300 Pro, 3200, Classic Pro
10011188	Nozzle + Needle Kit 2.0	3300 GTO, 3300 Pro, Classic Pro
10011192	Nozzle + Needle Kit 2.2	3300 GTO, 3300 Pro, Classic Pro
10011189	Nozzle + Needle Kit 2.5	3300 GTO, 3300 Pro, Classic Pro
10011190	Nozzle + Needle Kit 2.8	3300 GTO, 3300 Pro, Classic Pro
10011254	Nozzle + Needle Kit 1.4	Classic Pro XD
10011255	Nozzle + Needle Kit 1.6	Classic Pro XD
10011256	Nozzle + Needle Kit 1.8	Classic Pro XD
10011257	Nozzle + Needle Kit 2.0	Classic Pro XD
10011258	Nozzle + Needle Kit 2.2	Classic Pro XD
10011259	Nozzle + Needle Kit 2.5	Classic Pro XD
10011260	Nozzle + Needle Kit 2.8	Classic Pro XD
10011370	Nozzle + Needle Kit + Aircap 1.6	Classic Lux Gravity
10011371	Nozzle + Needle Kit + Aircap 1.8	Classic Lux Gravity
10011372	Nozzle + Needle Kit + Aircap 2.0	Classic Lux Gravity
10011373	Nozzle + Needle Kit + Aircap 2.5	Classic Lux Gravity
10011374	Nozzle + Needle Kit + Aircap 1.6	Classic Lux Suction
10011375	Nozzle + Needle Kit + Aircap 1.8	Classic Lux Suction
20010148	Nozzle + Needle Kit 2.0	Classic Smooth
20010149	Nozzle + Needle Kit 2.5	Classic Smooth
20010145	Nozzle + Needle Kit 1.4	Classic Lux Pressure
20010147	Nozzle + Needle Kit 1.8	Classic Lux Pressure
10011376	Nozzle + Needle Kit 0.8	474
10011377	Nozzle + Needle Kit 1.0	474
20010112	Nozzle + Needle Kit 2.2	4001 Gotele Pressure
20010113	Nozzle + Needle Kit 2.8	4001 Gotele Pressure
20010114	Nozzle + Needle Kit 3.2	4001 Gotele Pressure
20010115	Nozzle + Needle Kit 4.0	4001 Gotele Pressure
10011378	Nozzle + Needle Kit 2.8	4022 Gotele Pressure
10011379	Nozzle + Needle Kit 3.2	4001 Gotele Pressure
49000431	Nozzle + Needle Kit 1.4	Junior G
49000432	Nozzle + Needle Kit 1.6	Junior G
49000433	Nozzle + Needle Kit 1.8	Junior G





### **SPAIN**

Urarte, 6 · 01010  
Vitoria-Gasteiz (Álava)  
Tel.: (+34) 945 214 150  
Fax: (+34) 945 214 147  
sagola@sagola.com  
[www.sagola.com](http://www.sagola.com)

### **MEXICO**

Calle 2 · No. 5C · Bodega 6  
Parque Industrial Benito Juárez  
C.P. 76120 Santiago de Querétaro  
(Querétaro) MEXICO  
Tel.: (+52) 442 388 5099  
sagolamexico@sagolamexico.mx  
[www.sagolamexico.mx](http://www.sagolamexico.mx)

